

SOLID

WOW

SOLID

A new geometry in perfect balance.

A tool to allow freedom of design through an elegant range of colours in 5 modular sizes.

Pushing the boundaries, the key ingredients are: porcelain, rectified, coloured through body and its modularity as the inspiration for efficient design.

Innovative and combinable in an infinite number of ways.



01. SIZES, COLOURS AND FINISHES / FORMATOS, COLORES Y ACABADOS	<i>pag. 6</i>
02. GET INSPIRED / INSPIRATE	<i>pag. 8</i>
03. LAYOUTS / COLOCACIONES	<i>pag. 37</i>
04. RECOMMENDATIONS / RECOMENDACIONES	<i>pag. 42</i>
05. TECHNICAL FEATURES / CARACTERÍSTICAS TÉCNICAS	<i>pag. 43</i>
06. TECHNICAL DRAWINGS / DIBUJOS TÉCNICOS	<i>pag. 44</i>
07. PACKING	<i>pag. 45</i>




SOLID



Chalk



Sky

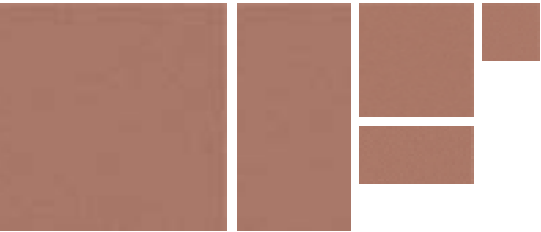

Cotto



Moss




Ash



Basalt

FORMATS



XL
25x25cm /
10"X10"



L
12,5x25cm /
5"X10"




M
12,5x12,5cm /
5"X5"




S
6,2x12,5cm /
2.5"X5"



XS
6,2x6,2cm /
2.5"X2.5"

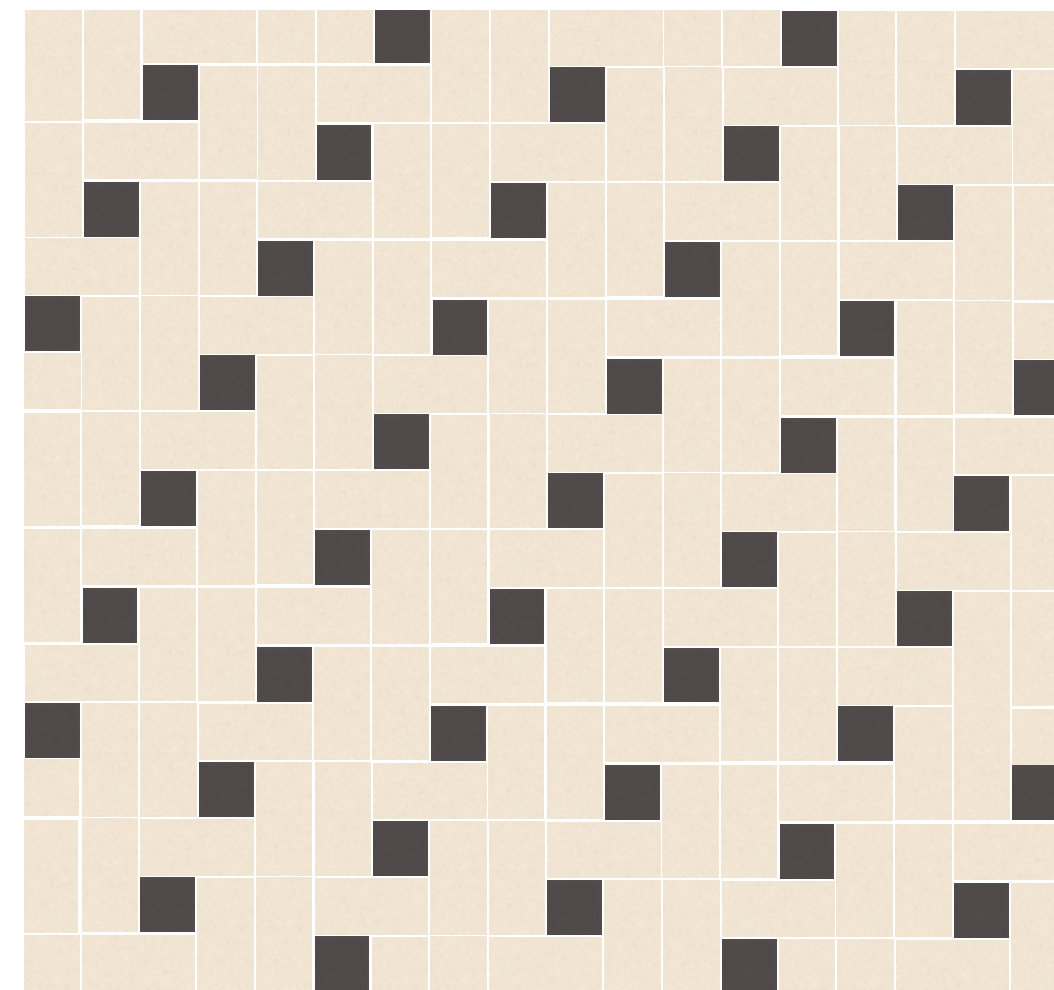


Solid S Chalk - 86%
Solid XS Basalt - 14%

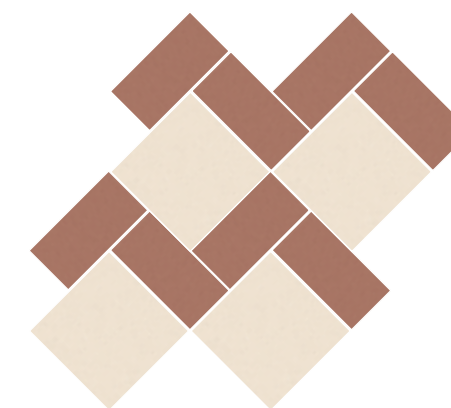


Wall tiles:
Solid S Chalk - 14%
Solid XS Cotto - 86%

Floor tiles:
Solid S Cotto - 50%
Solid M Chalk - 50%

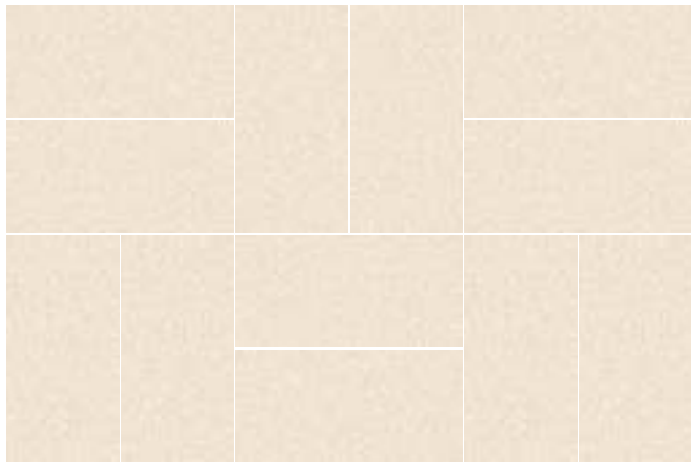


Solid L Chalk - 100%

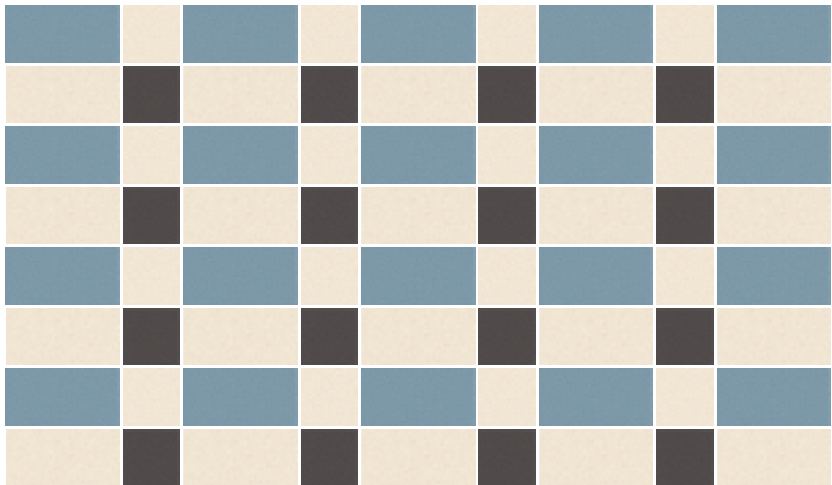

Solid XS Chalk - 17% & Basalt - 17%
Solid S Sky - 33% & Chalk - 33%



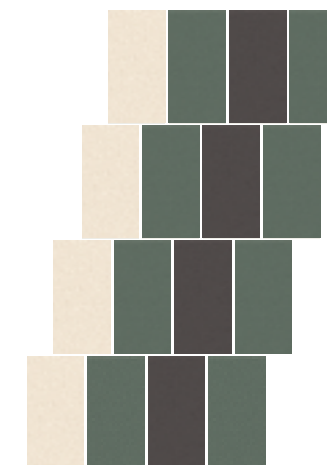


Wall tiles:
Solid S Moss - 100%


Floor tiles:
Solid S Moss - 50%
Chalk - 25% & Basalt - 25%




Floor tiles:
Contempo Strip Natural
(Love Affairs Collection)

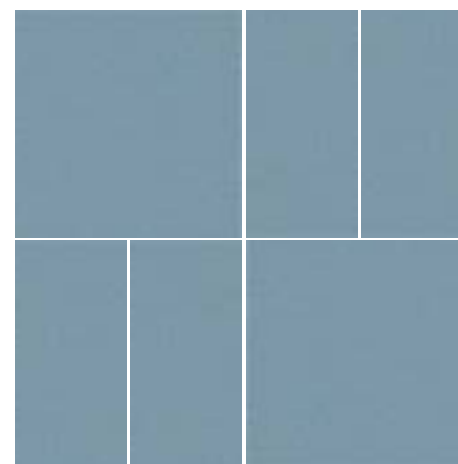

Solid XL Sky - 50%
Solid L Sky - 50%

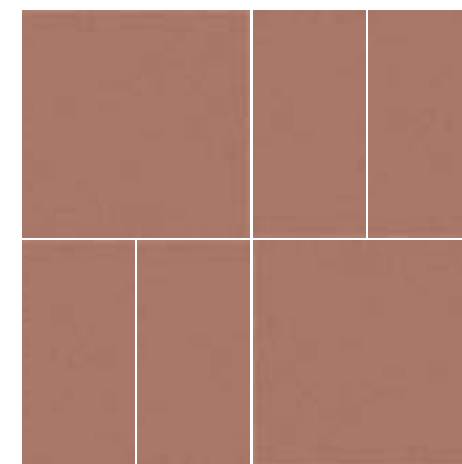

Solid XL Cotto - 50%
Solid L Cotto - 50%

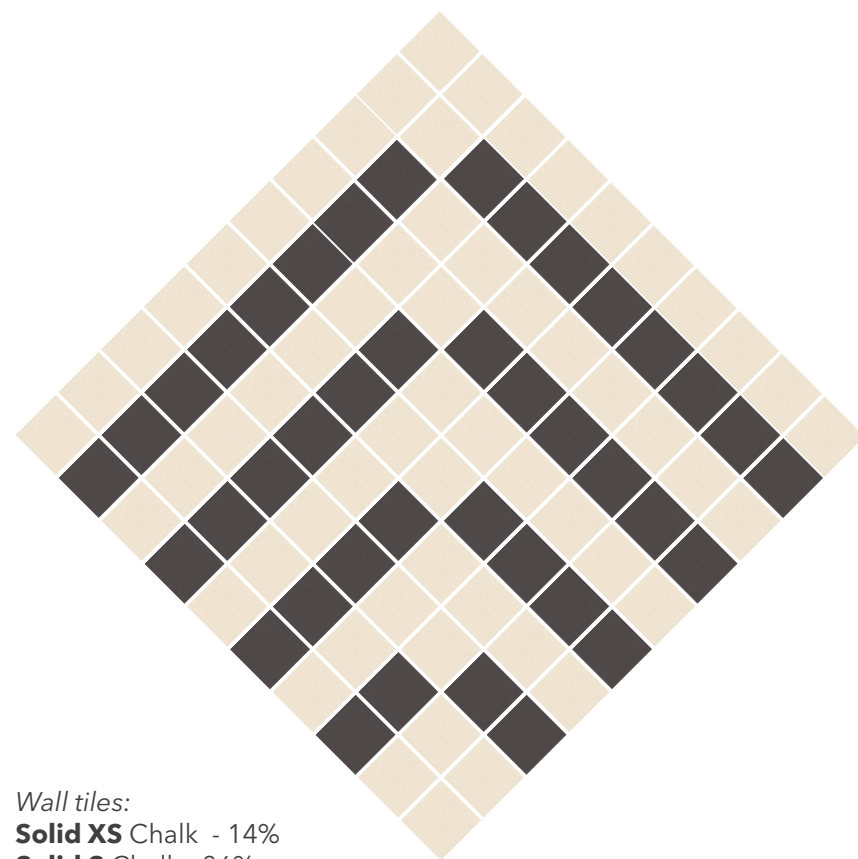

Wall tiles:
Solid XS Chalk - 14%
Solid S Chalk - 86%

Floor tiles:
Solid XS Chalk - 60%
 & Basalt - 40%

Bar tiles:
Moon Graphite Matt
 (Wow Collection)







Solid XL Cotto - 89%
Solid S Basalt - 11%




Solid XS Moss - 12,5% & Cotto - 12,5%
Solid S Moss - 50% & Chalk - 25%

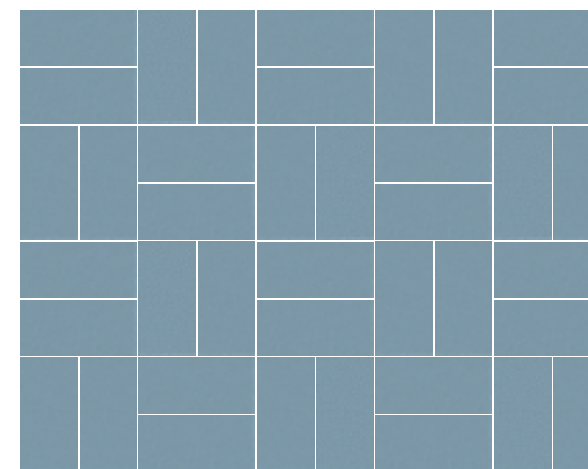

Solid S Sky - 100%

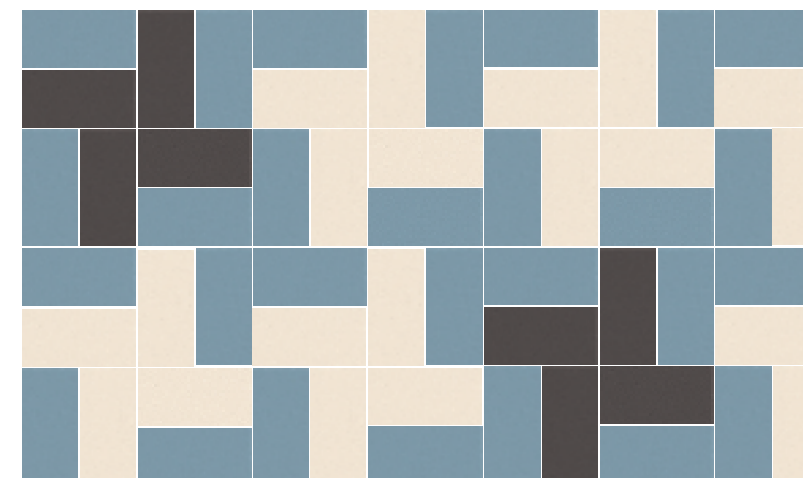

Solid S Sky - 50%, Chalk - 36% & Basalt - 14%

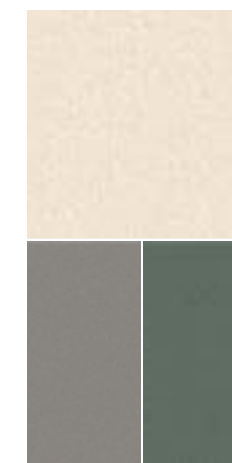

Wall tiles:


Solid L Ash - 50%

Solid XL Ash - 50%


Floor tiles:

Solid L Ash - 25% & Moss 25%


Solid XL Chalk - 50%

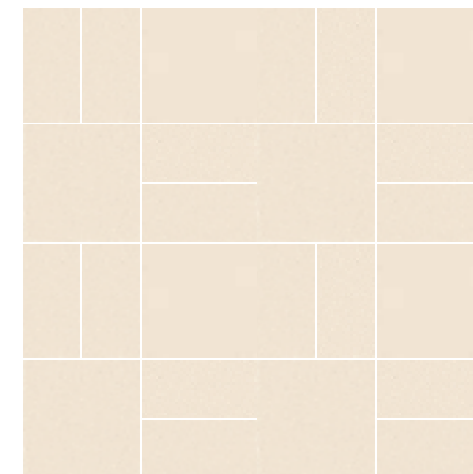


Solid M Chalk - 50%
Solid S Chalk - 50%

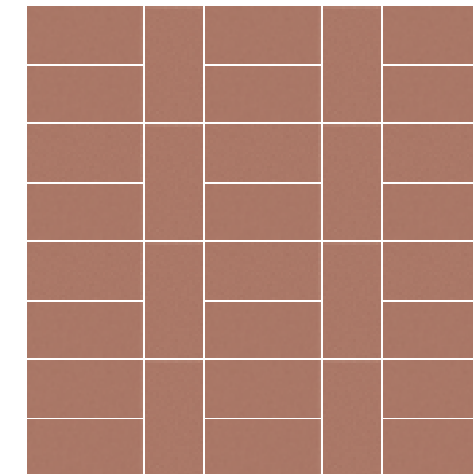


Solid S Cotto - 100%

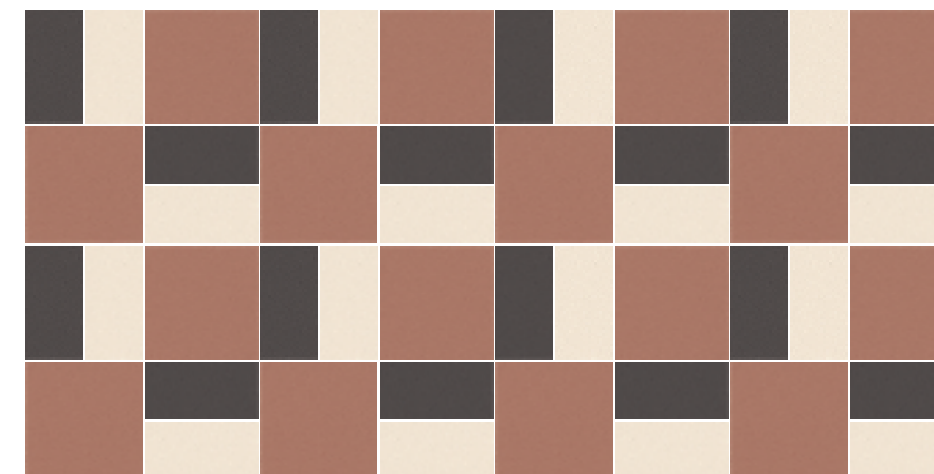

Solid M Cotto - 50%
Solid S Chalk - 25% & Basalt - 25%

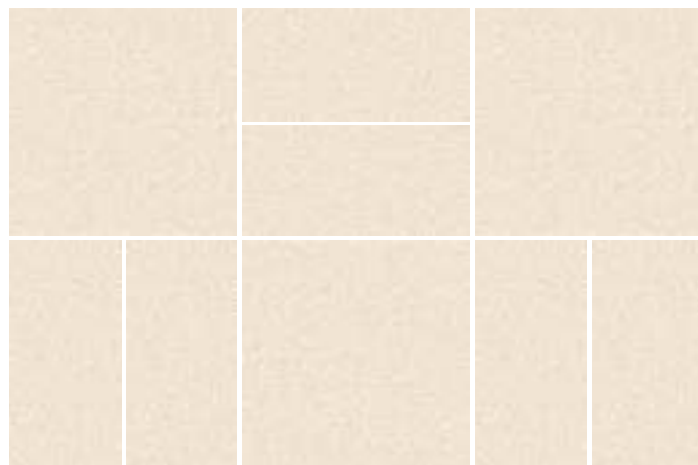


Solid XL Chalk - 50%
Solid L Chalk - 50%

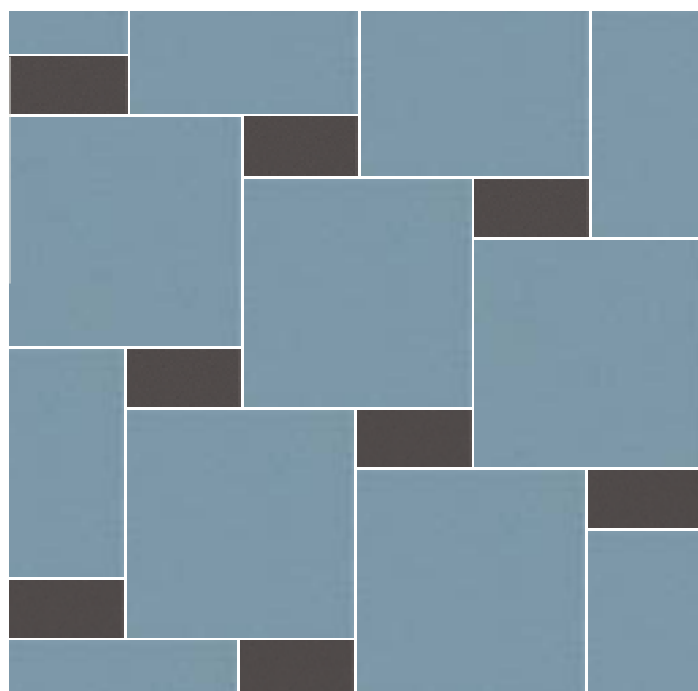


Solid XL Sky - 89%
Solid S Basalt - 11%




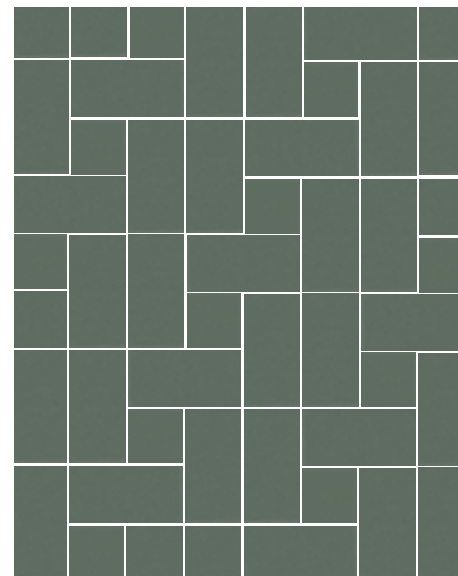


Solid S Moss - 86%
Solid XS Moss - 14%

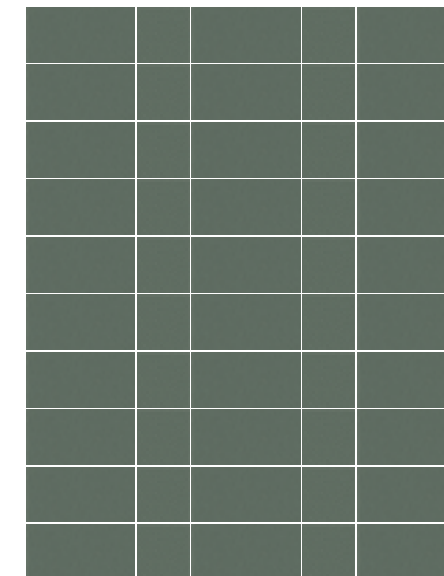

Solid S Moss - 67%
Solid XS Moss - 33%

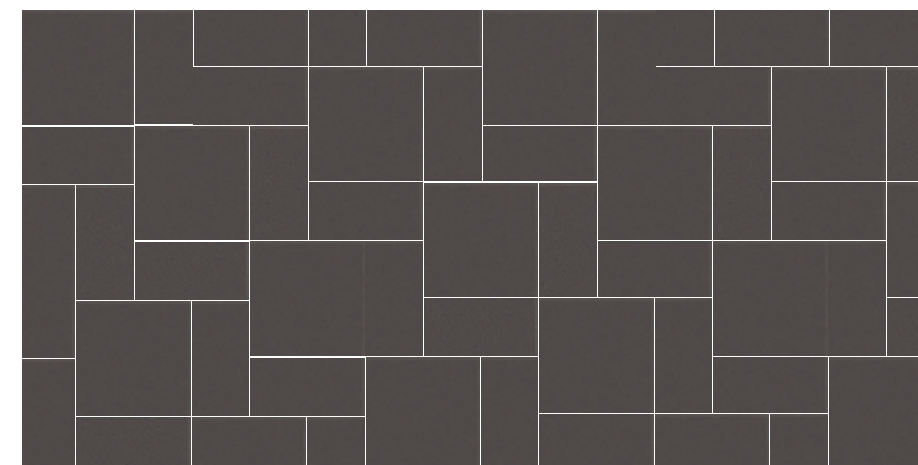


Solid M Basalt - 50%
Solid S Basalt - 50%

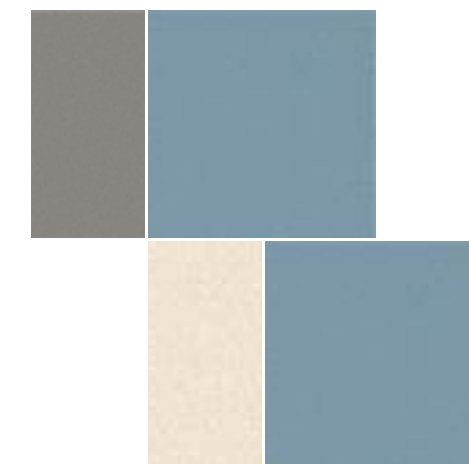


Wall tiles:
Solid L Chalk - 16,5% & Ash - 16,5%
Solid XL Sky - 67%


Other tiles:
Contempo Strip Natural
(Love Affairs Collection)

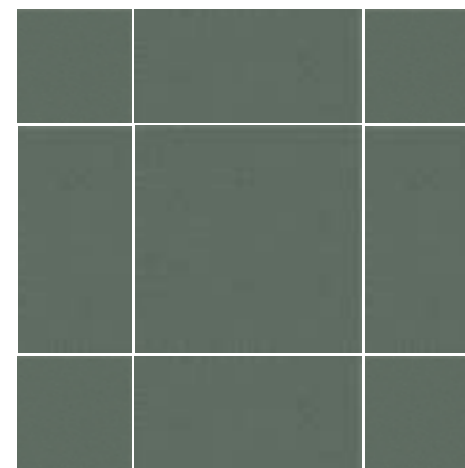


Solid XL Moss - 25%
Solid L Moss - 50%
Solid M Moss 25%

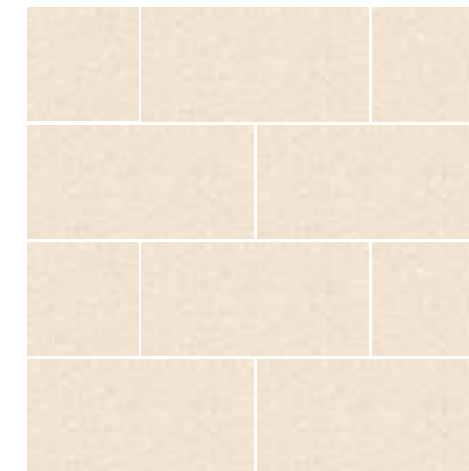

Solid L Chalk 100%

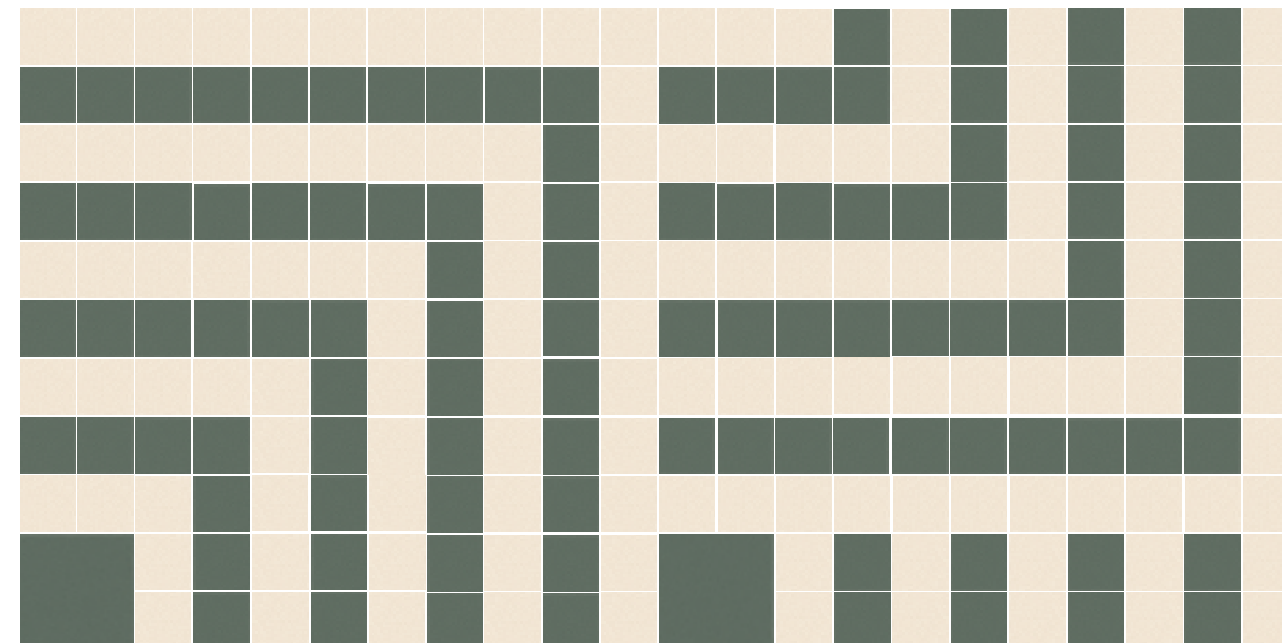


Solid M Moss - 3,5%
Solid XS Moss - 43% & Chalk - 53,5%

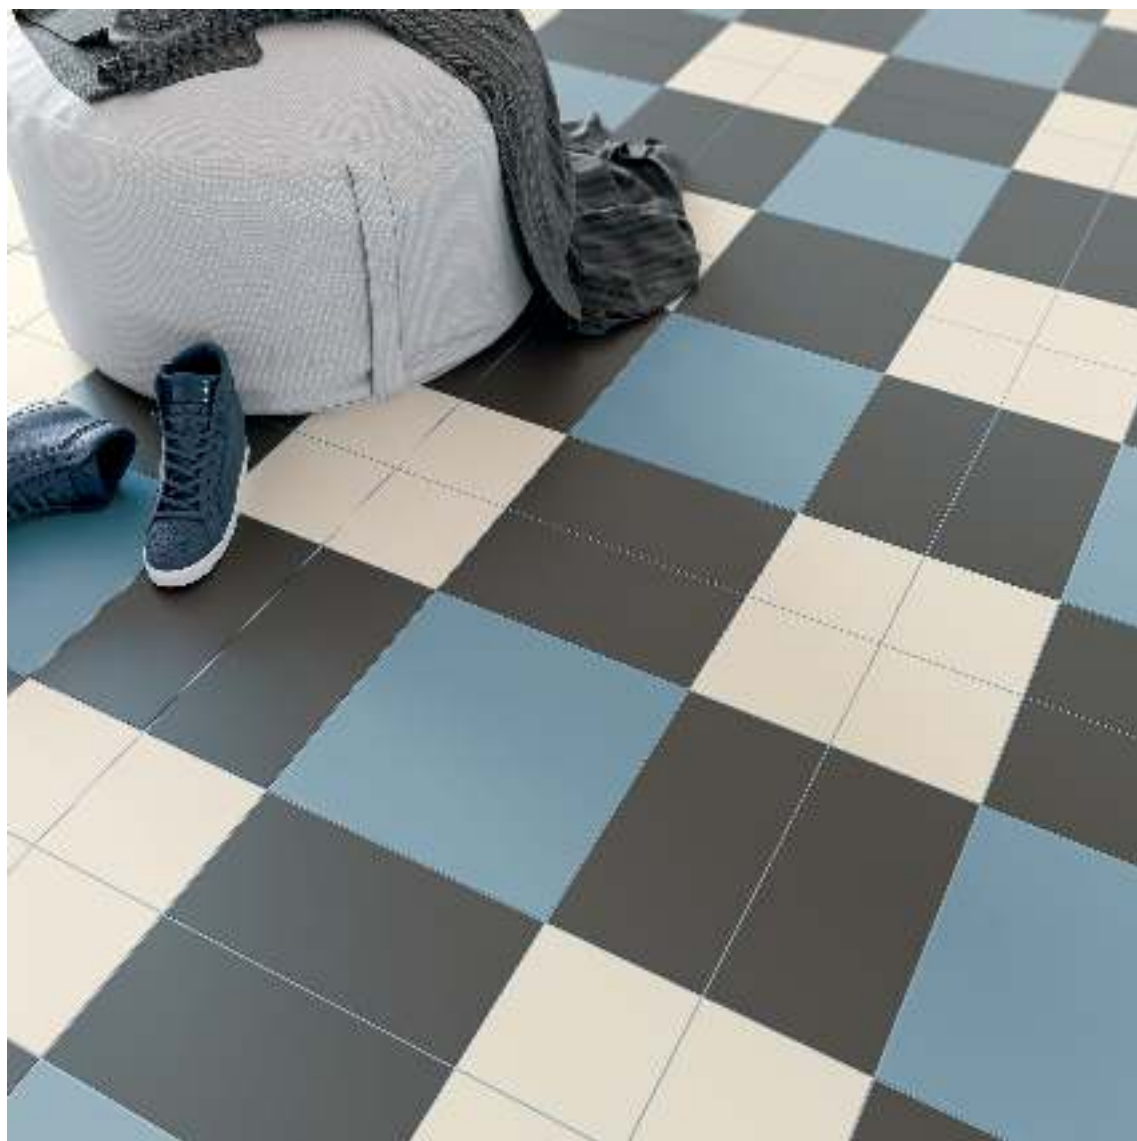


Solid XL Sky - 25%
Solid L Basalt - 50%
Solid M Chalk 25%


UNLIMITED COMPOSITIONS

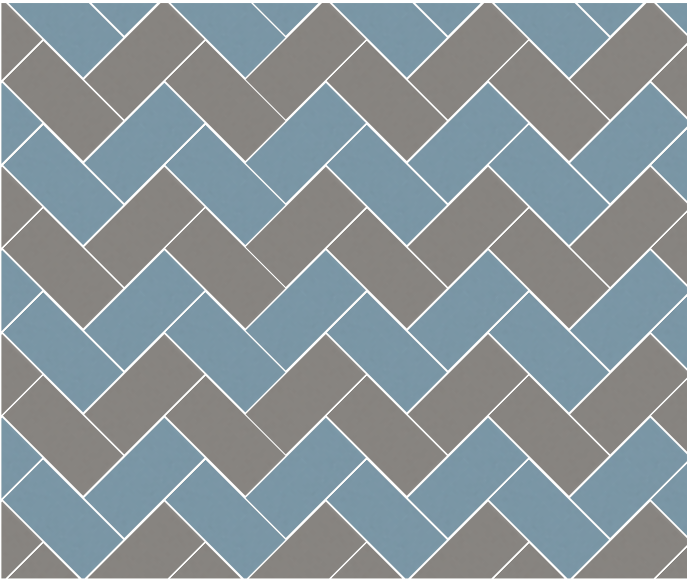


Solid S Ash - 50%
Solid S Sky - 50%

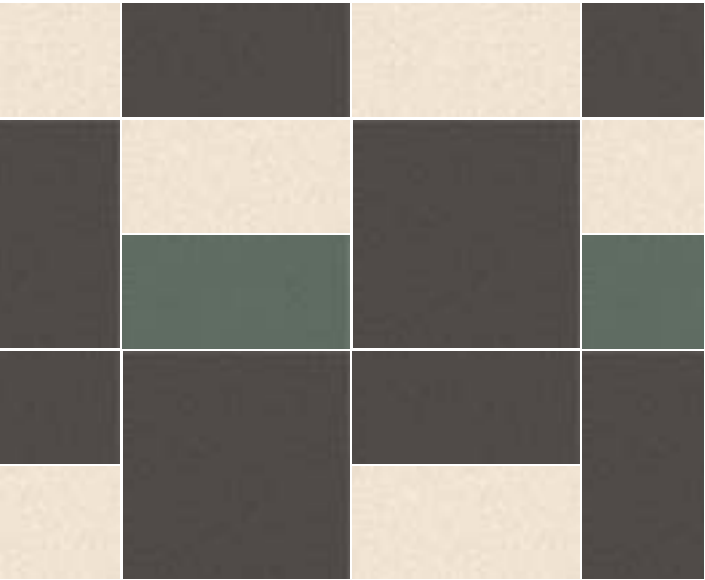


Solid S Chalk - 25%, Basalt - 12,5% & Moss - 12,5%
Solid M Basalt - 50%

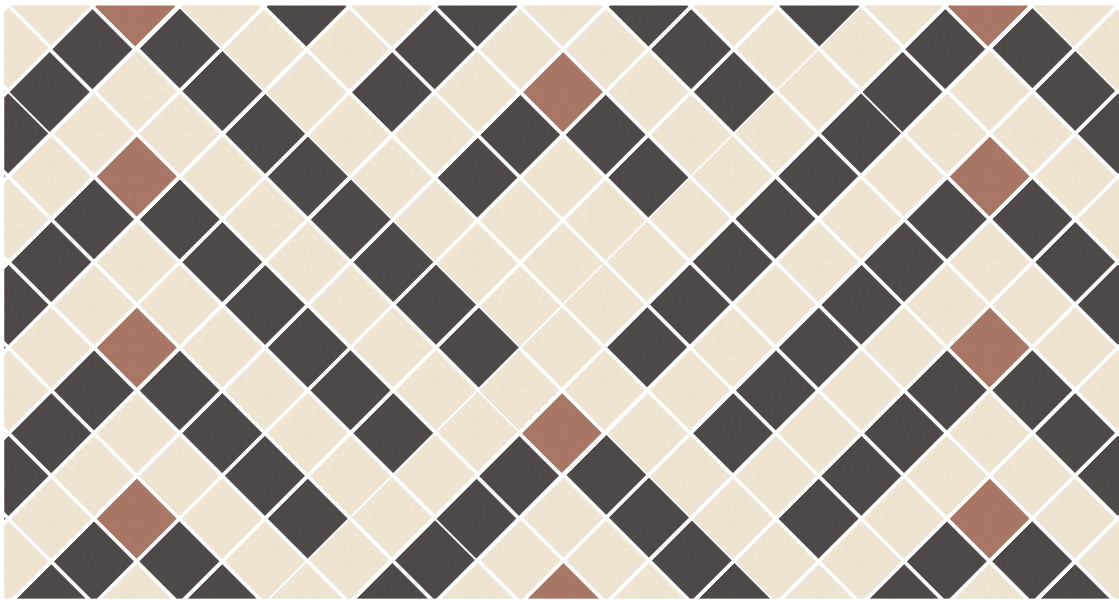


Solid XS Chalk - 60%
Basalt - 36% & Cotto 4%

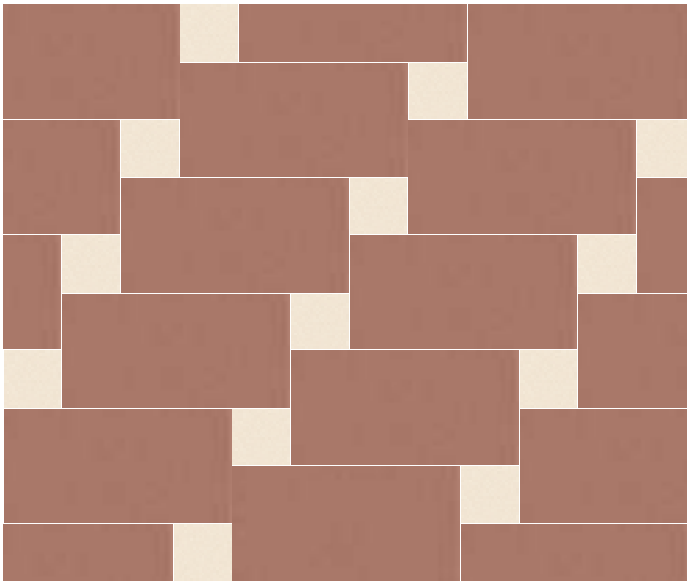


Solid L Cotto - 80%
Solid XS Chalk - 20%

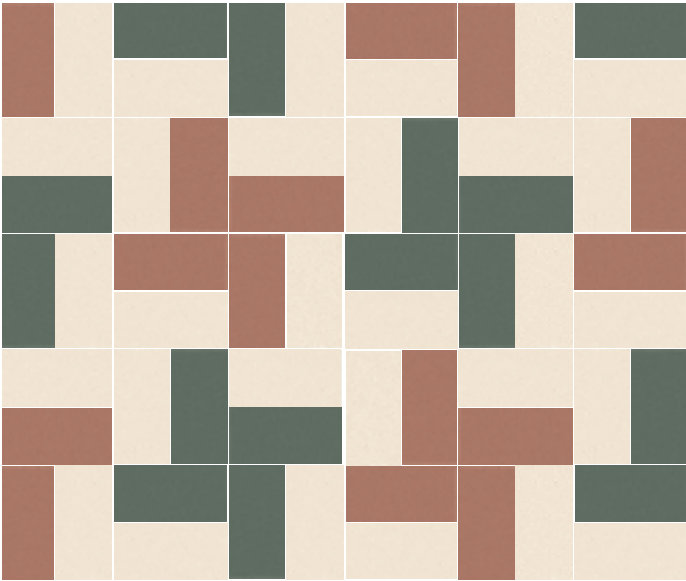


Solid S Chalk - 50%, Cotto - 25% & Moss - 25%

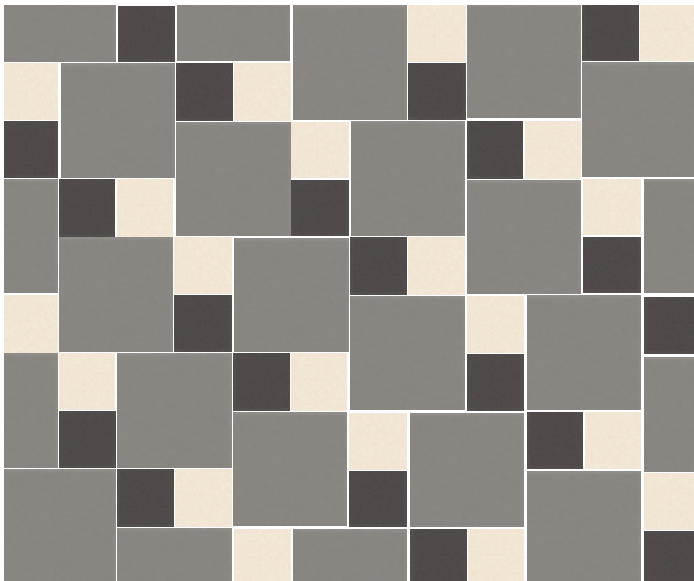


Solid M Ash - 77%
Solid XS Chalk - 16,5% & Basalt - 16,5%

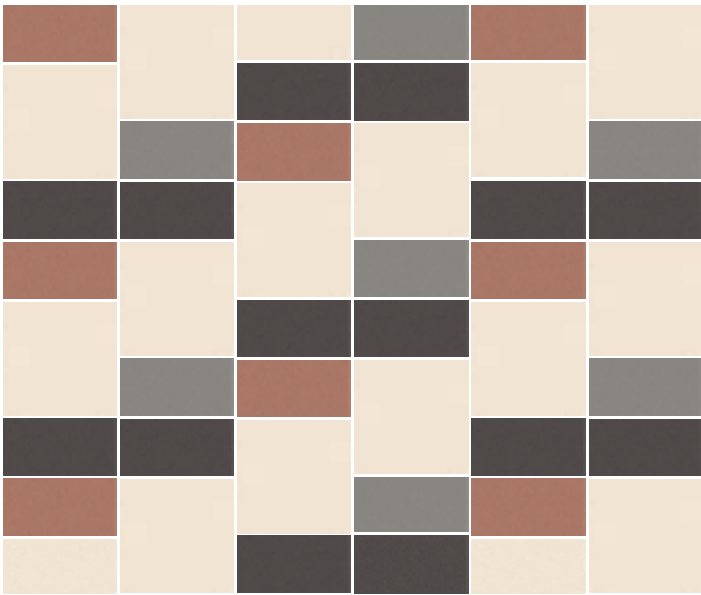

Solid M Chalk - 50%
Solid S Basalt - 25%, Cotto - 12% & Ash - 12%

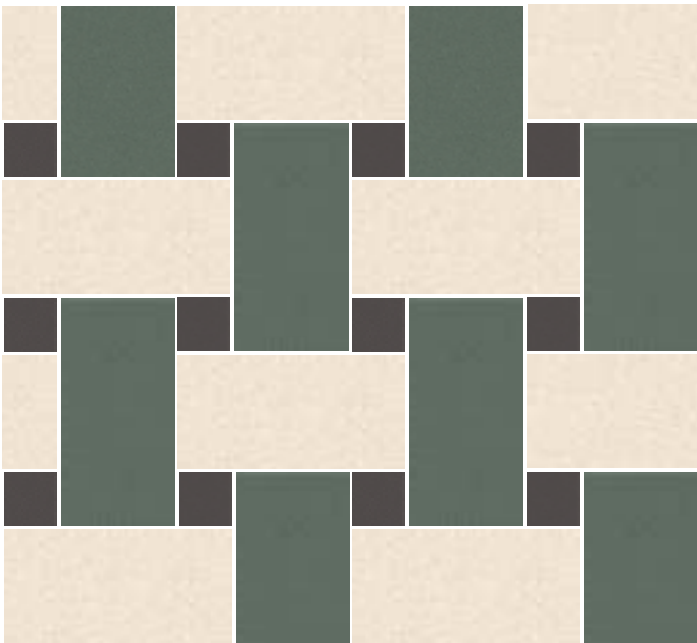


Solid L Chalk - 44% & Moss - 44%
Solid XS Basalt - 12%

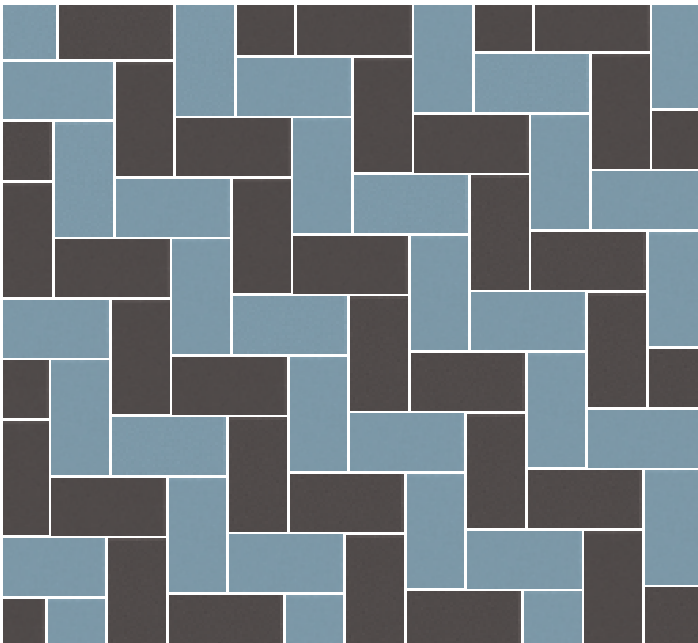


Solid S Basalt - 50% & Sky - 50%




Solid XL Moss - 44%
Solid L Ash - 44%
Solid M Basalt - 12%

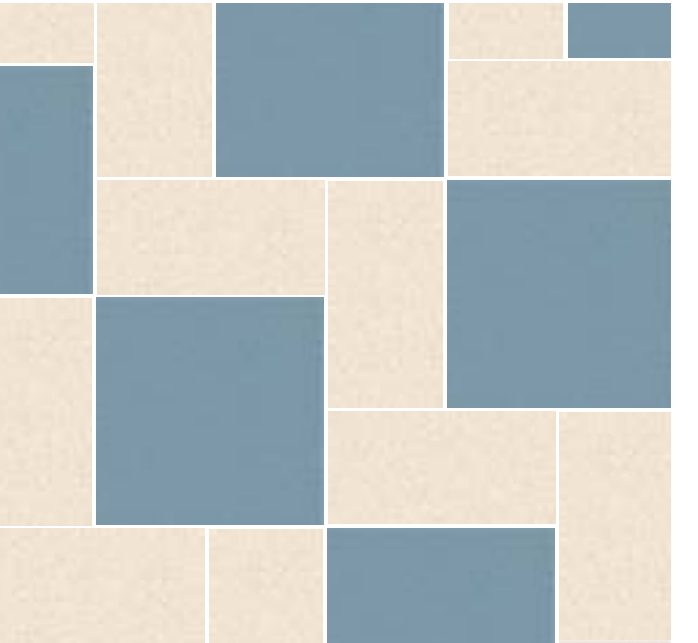


Solid XL Sky - 50%
Solid L Chalk - 50%

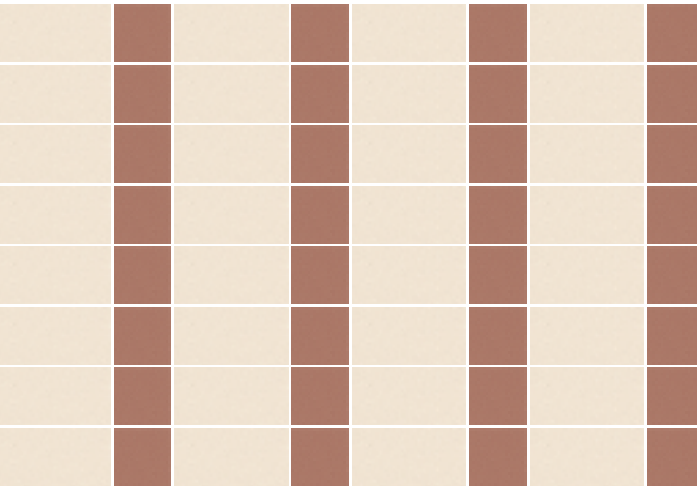


Solid S Chalk - 66,6%
Solid XS Cotto - 33,3%

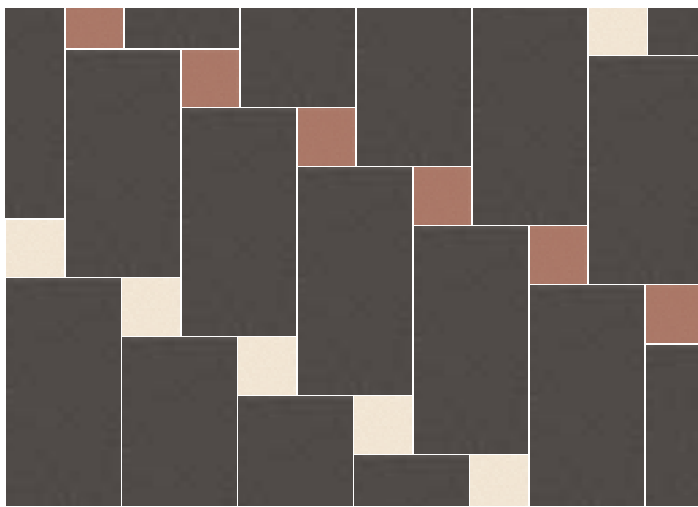

Solid L Basalt - 80%
Solid XS Cotto - 10% & Chalk - 10%

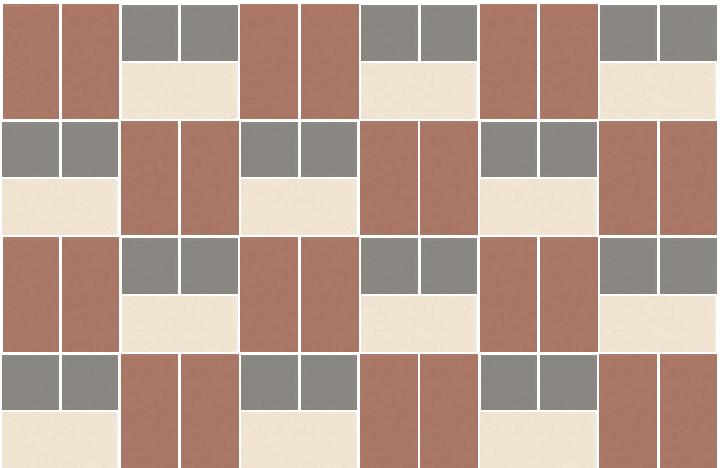

Solid S Cotto - 50% & Chalk - 25%
Solid XS Ash - 25%

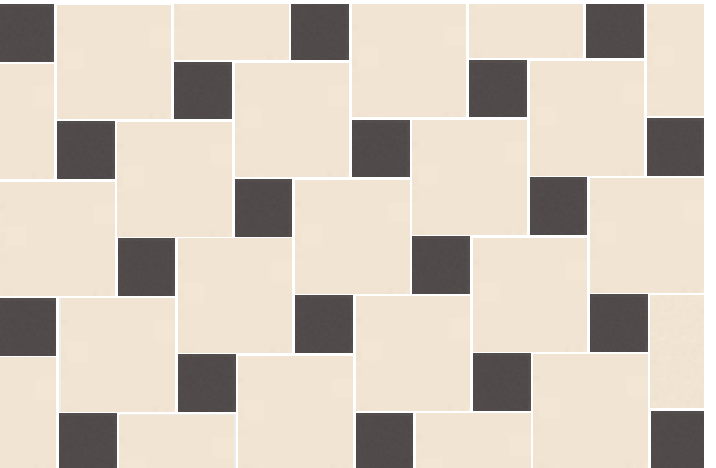

Solid M Chalk - 80%
Solid XS Basalt - 20%

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías. Todos los formatos de esta colección son modulares y combinables entre si. Para un resultado óptimo recomendamos usar 1,5 mm de junta.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems. All formats in this collection are modular and combinable with each other. For an optimal result we advise to use 1,5 mm (0.06”) grout.


MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

Dry-pressed ceramic tiles whith water absorption B la ≤ 0,5% for interior and exterior floors and walls.
Baldosas cerámicas prensadas en seco con absorción de agua B la ≤ 0,5% para suelos y paredes interiores y exteriores.

FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	XL: 251,5mm +/- 0,6 % x 251,5mm +/- 0,6 % x 8,5 mm+/- 5 % L: 251,5mm +/- 0,6 % x 125mm +/- 0,9 mm x 8,5 mm+/- 5 % M: 125mm +/- 0,9 mm x 125mm +/- 0,9 mm x 8,5 mm+/- 5 % S: 125mm +/- 0,9 mm x 61,75mm +/- 0,9 mm x 8,5 mm+/- 5 % XS: 61,75mm +/- 0,9 mm x 61,75mm +/- 0,9 mm x 8,5 mm+/- 5 %	UNE-EN ISO 10545-2:1998
 Water absorption	$E_b \leq 0,5\%$	UNE-EN ISO 10545-3:1997
 Modulus of rupture	Minimum 35 N/mm ² Individual Minimum 32 N/mm ²	UNE-EN ISO 10545-4:2012
 Resistance to deep abrasion	$< 175 \text{ mm}^3$	UNE-EN ISO 10545-7:1999
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Frost resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:1998
 Chemical resistance	GHA	UNE-EN ISO 10545-13:1998
 Stain resistance	>3	UNE-EN ISO 10545-14:1998
 Non-slip value	R10 / CLASS 2 DCOF $>0,42$	DIN 51130:2014 ANSI A137.1:2012

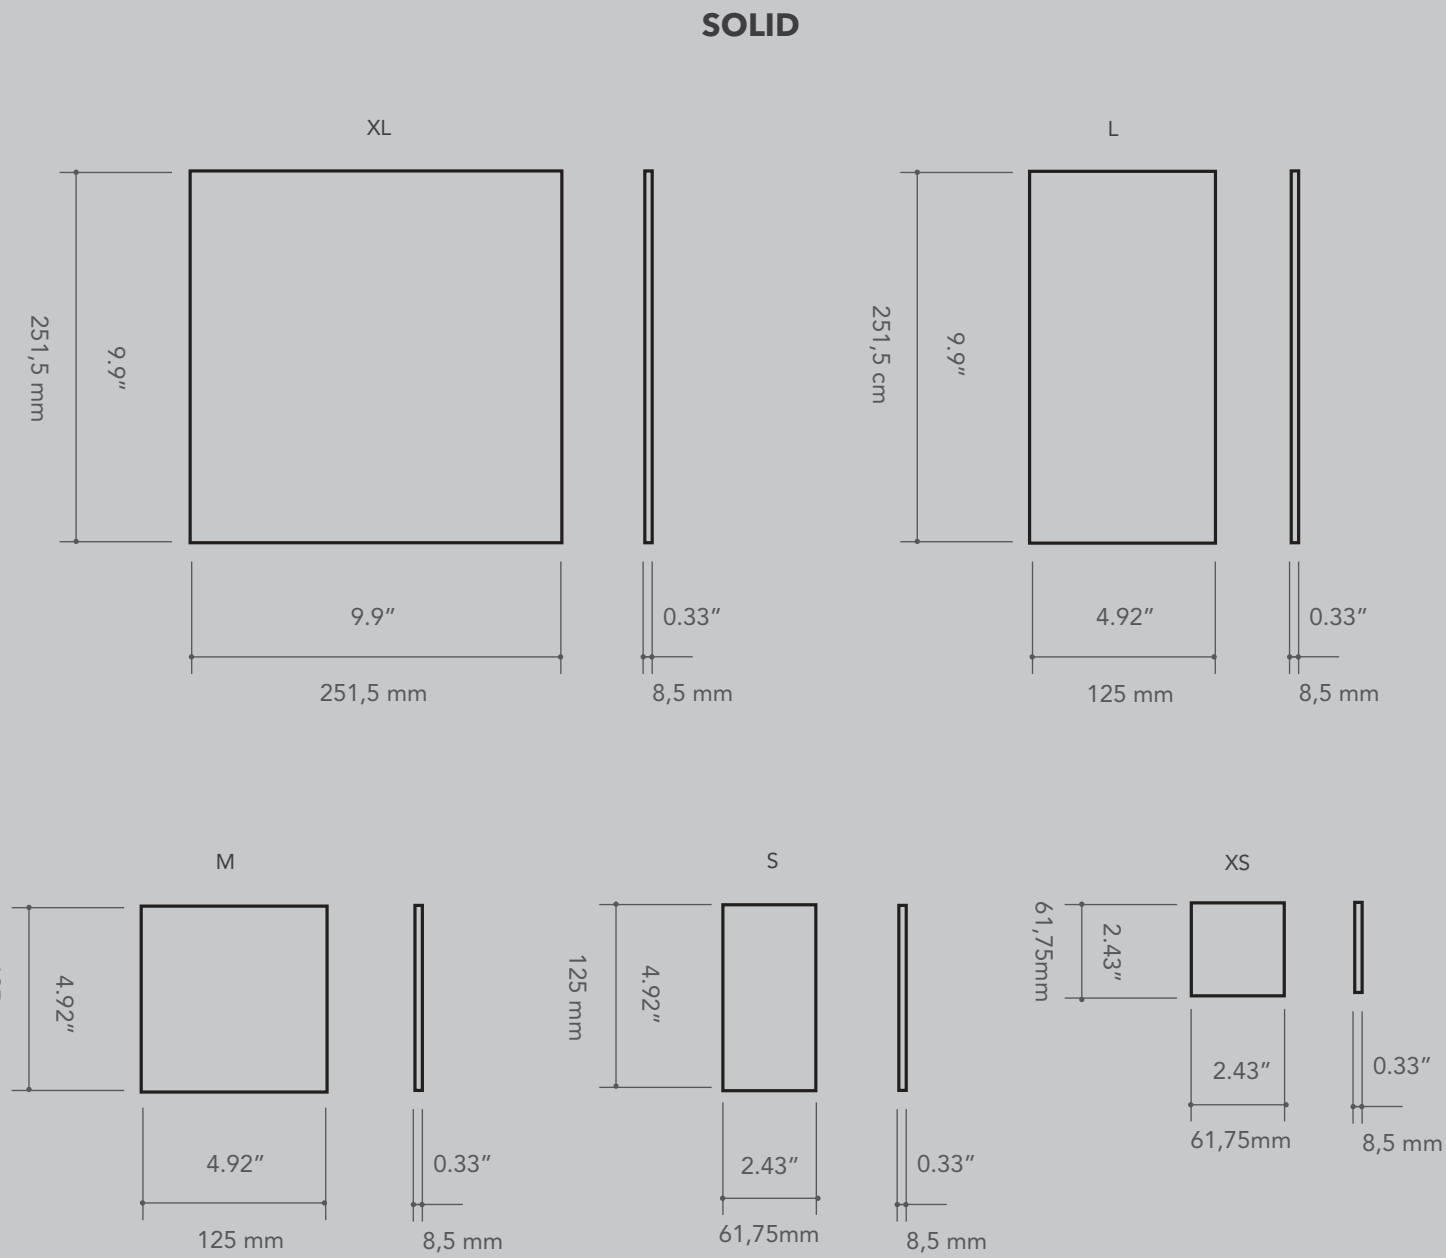

Model	Size (in)	Pieces/box	lb/box	sq ft/box	Box/pallet	sq ft/pallet
Solid XS	2.5"x2.5"	112	17.90 lb	4.607 sq ft	120	522.840 sq ft
Solid S	2.5"x5"	56	18.59 lb	4.661 sq ft	120	559.320 sq ft
Solid M	5"x5"	39	25.11 lb	6.555 sq ft	85	557.175 sq ft
Solid L	5"x10"	40	54.23 lb	13.541 sq ft	48	649.968 sq ft
Solid XL	10"x10"	20	52.84 lb	13.616 sq ft	48	653.568 sq ft

Modelo Model	Tamaño (cm) Size (cm)	Piezas/caja Pieces/box	Kg/caja kg/box	m²/caja m²/box	Cajas/palet Box/pallet	m²/palet m²/pallet
Solid XS	6,2x6,2 cm	112	8,12 kg	0,428 m²	120	51,360 m²
Solid S	6,2x12,5 cm	56	8,43 kg	0,433 m²	120	51.960 m²
Solid M	12,5x12,5 cm	39	11,39 kg	0,609 m²	85	51,765 m²
Solid L	12,5x25 cm	40	24,60 kg	1,258 m²	48	60,384 m²
Solid XL	25x25 cm	20	23,97 kg	1,265 m²	48	60,720 m²



Polígono Pont, Avda. de España 114
12180 Cabanes,
Castellón (Spain)
t. +34 964 331 910 / f. +34 964 331 911

www.wowdesigneu.com
comercial@wowdesigneu.com



©2019 **Tendencias Cerámicas**
WOW, registered trademark of Tendencias Cerámicas, S.L.

The brand use or reproduction of the contents of this catalog, is protected by copyright law. Any use of the brand or reproduction thereof, in part or total, must be authorized by Tendencias Cerámicas, S.L. Otherwise, this action can be sanctioned according to the Law.

©2019 **Tendencias Cerámicas**
WOW, marca registrada por Tendencias Cerámicas, S.L.

La utlización de la marca o la reproducción del contenido de este catálogo está protegida por la Ley de Propiedad Intelectual. Cualquier uso de la marca o la reproducción del mismo, en parte o en su totalidad, debe ser autorizada por Tendencias Cerámicas, S.L., pudiendo, en caso contrario, ser esta acción sancionada de acuerdo con la Ley.

WOW reserves the right to modify and/or discontinue certain models displayed in this catalogue.
The colour of the pieces displayed herein may differ slightly from originals.
The settings shown in this catalogue are design proposals for advertising purposes.
In real situations in wich the pieces are laid, the installation instructions published by WOW should be followed.

WOW se reserva el derecho de modificar y/o suprimir ciertos modelos expuestos en este catálogo sin previo aviso.
Los colores de las piezas pueden presentar ligeras diferencias respecto a las originales.
Los ambientes que se muestran en este catálogo son sugerencias decorativas de carácter publicitario, debiéndose utilizar en la instalación real las instrucciones de colocación editadas por WOW.



Designed by



wooddesignsuz.com